

140x140x38 mm


238.5~297.9 CFM




■ Specifications

| Model | Bearing | Rating Voltage | Power Current | Power Consumption | Speed | Air Flow | Static Pressure | Noise | Weight | Curve |
|--------------------|--------------|----------------|---------------|-------------------|-------|----------|-------------------------|---------|--------|-------|
| | 2BALL Sleeve | (VDC) | (mA) | (WATTS) | (RPM) | (CFM) | (inch-H ₂ O) | (dB(A)) | (g) | |
| PFE0381BX-000U-A99 | ☉ | 12 | 3300 | 39.60 | 6800 | 297.9 | 2.05 | 68.3 | 472.0 | 1 |
| PFE0381B1-000U-A99 | ☉ | 12 | 1720 | 20.64 | 5500 | 238.5 | 1.20 | 62.0 | 472.0 | 2 |

■ Air Flow-Static Pressure Characteristics

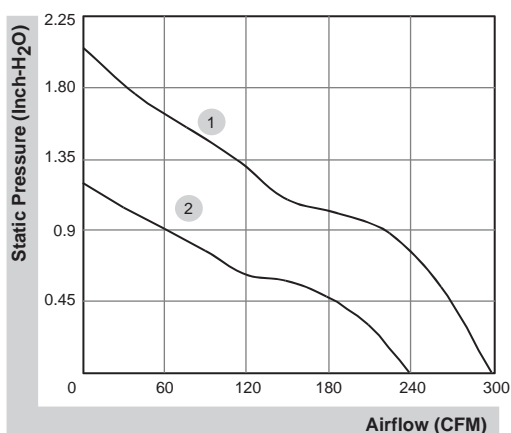

■ External dimensions(mm)

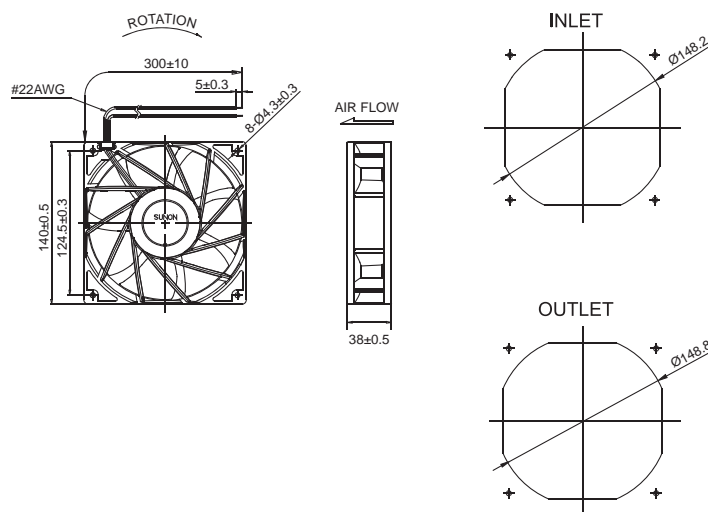

*All model could be customized. Please contact with Sunon Sales.

*Specifications are subject to change without notice. Please Visit SUNON website at www.sunon.com for update information.

140x140x38 mm


282.6 CFM




■ Specifications

| Model | Bearing | Rating Voltage | Power Current | Power Consumption | Speed | Air Flow | Static Pressure | Noise | Weight | Curve |
|--------------------|--------------|----------------|---------------|-------------------|-------|----------|-------------------------|---------|--------|-------|
| | 2BALL Sleeve | (VDC) | (mA) | (WATTS) | (RPM) | (CFM) | (inch-H ₂ O) | (dB(A)) | (g) | |
| PFE0384BX-000U-A99 | 2BALL Sleeve | 48 | 740 | 35.52 | 6600 | 282.6 | 1.88 | 65.9 | 560.0 | 1 |

■ Air Flow-Static Pressure Characteristics

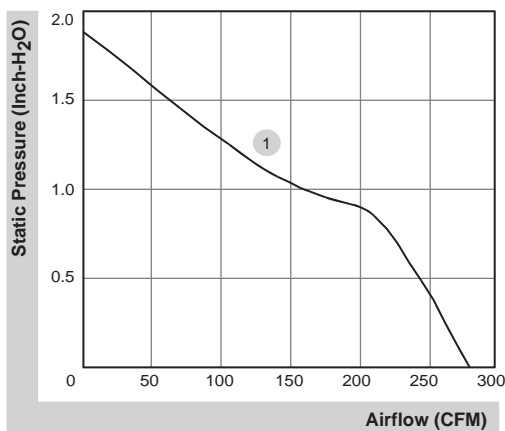

■ External dimensions(mm)

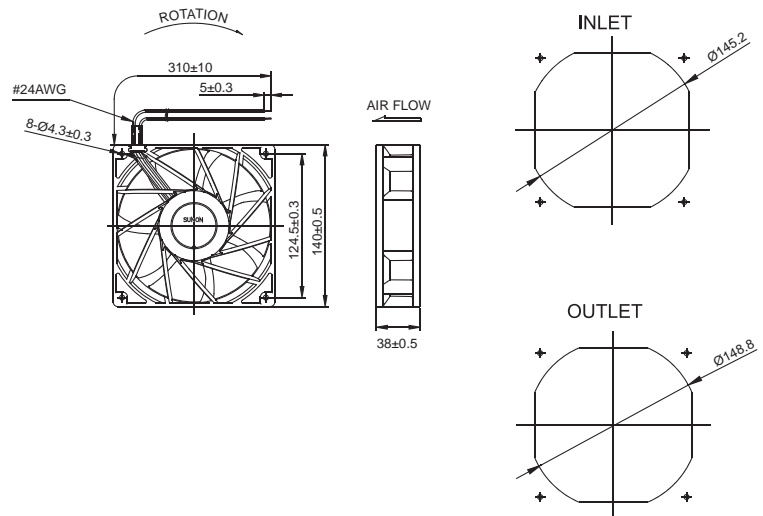

*All model could be customized. Please contact with Sunon Sales.

*Specifications are subject to change without notice. Please Visit SUNON website at www.sunon.com for update information.